

# Calypso Split Inverter

WALL-MOUNTED OR FLOOR-STANDING HEAT PUMP WATER HEATER  
WITH OUTDOOR COMPRESSOR UNIT



## + PRODUCT

### COMFORT

- Space-saving solution for installation even in small rooms thanks to outdoor unit
- High efficiency due to Inverter technology
- Low noise level for installation in living areas
- Auto function for smart piloting
- Comfort thanks to electric back-up

### QUALITY - DURABILITY


- ACI hybrid anti-corrosive protection
- Steatite technology (ceramic dry heating element)
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to prevent corrosion around flange

### USER-FRIENDLINESS

- Easy mounting for wall fixation
- Intuitive digital control panel with built-in daily programming, different modes selection, display showing energy consumption
- Compatible with Cozytouch for remote piloting through a smartphone or a tablet
- Installation is recommended in geographic areas from -15° to 37°C

### SAVINGS

- Up to 75% energy savings\* thanks to a high-performance heat pump
- CFC-free high-density insulation around tank for increased energy savings
- High-efficiency water inlet
- Smart energy consumption control

| HEAT PUMP WATER HEATER                                                              |                                                                                     | 200 L<br>(WALL-MOUNTED)                                                             |                                                                                     | 270 L<br>(FLOOR-STANDING)                                                             |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| Model available**                                                                   | Energy savings                                                                      | homecontrol®                                                                        | Tank protection                                                                     | Dry ceramic back-up heating element                                                   | Remote piloting                                                                       |

\*Compared with an electric water heater - \*\*Model types: A: Vertical wall-mounted / B: Horizontal wall-mounted / C: Floor-standing


# Calypso Split Inverter

## NEW ERGONOMIC INTERFACE





- 1 User-friendly digital screen
- 2 Direct access to menu
- 3 Direct access to Boost mode
- 4 Navigation buttons
- 5 Validation button
- 6 Return button


## INSTALLATION DIMENSIONS

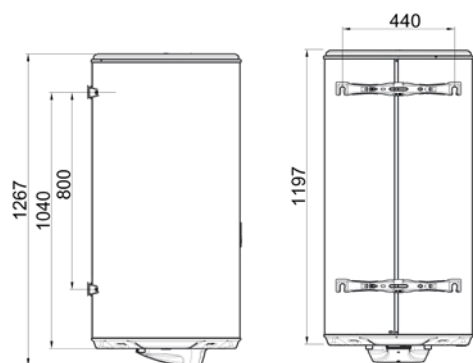

Vertical wall-mounted 200 L

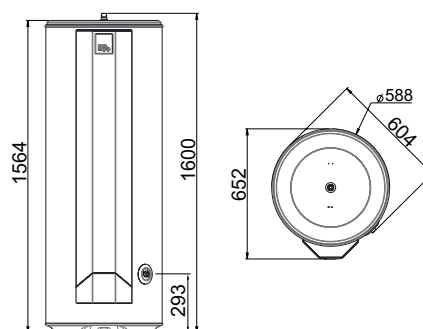

Floor-standing 270 L

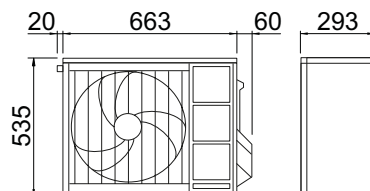

Outdoor unit

## TECHNICAL DATA

| MODEL                                            | WALL-MOUNTED     | FLOOR-STANDING   | OUTDOOR UNIT    |
|--------------------------------------------------|------------------|------------------|-----------------|
| Capacity (L)                                     | 200              | 270              | -               |
| ErP class                                        | A+               | A+               | -               |
| Profile                                          | L                | XL               | -               |
| Voltage frequency (V / HZ)                       | 230/50           | 230/50           | 230/50          |
| Maximal heat pump power consumption (W)          | -                | -                | 1100            |
| Heating element power (W)                        | 1800             | 1800             | -               |
| COP (at $T_{air} = 7^{\circ}\text{C}$ )          | 3.09 (L)         | 3.24 (XL)        | -               |
| Heating time (at $T_{air} = 7^{\circ}\text{C}$ ) | 2h57             | 4h27             | -               |
| Refrigerant fluid                                | -                | -                | R410A           |
| Refrigerant fluid load (g)                       | -                | -                | 850             |
| Acoustic power (dB(A))                           | -                | -                | 58              |
| Dimensions (height x width x depth) (mm)         | 1267 x 603 x 588 | 1600 x 652 x 588 | 535 x 293 x 743 |
| Weight (Kg)                                      | 55               | 66               | 26              |