

Neo Max

Premium horizontal water heater providing full comfort and durable long-term operation



ELECTRIC WATER HEATER

MODELS 20 TO 30
(Horizontal wall-mounted)



+ COMFORT

- Dedicated solution for direct hot water availability
- Easy and precise temperature control

+ DURABILITY

- Steatite Technology: Ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- Large-sized magnesium anode for increased tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange

+ INSTALLATION

- Easy installation with wall-mounting plates

Safe operation:

- IP 24 – full compliance with European standards for electrical safety and user protection


+ ENERGY SAVINGS

- Eco position for greater energy savings
- Energy efficiency due to CFC-free high-density insulation foam
- High-efficiency water inlet

+ USER-FRIENDLINESS

- Digital temperature display
- Ergonomic front knob
- Heating and shower ready light indicator


- 1 Enamel-coated sleeve
- 2 High-density, 0% CFC polyurethane foam
- 3 **MAGNESIUM ANODE** for protection against corrosion
- 4 Inlet diffuser
- 5 Optimised stainless steel outlet pipe
- 6 **DIAMOND-QUALITY GLASS LINING** for long life and reliability

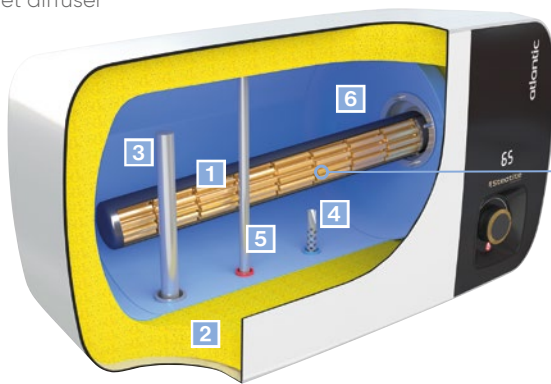

Steatite
TECHNOLOGY

DRY STEATITE HEATING ELEMENT

Adapted to aggressive, highly mineralised and desalinated water. Its protective enamel-coated steel sleeve makes maintenance easy, and there is no need ever to drain the tank to replace it.



Technical data

Model	Installation type	Output (W)	Voltage (V)	Heat-up time ($\Delta t=50^{\circ}\text{C}$) (min)	Heat-up time ($\Delta t=35^{\circ}\text{C}$) (min)	Energy consumption kWh/24 h at 65°C	ErP energy class
20	Horizontal	2500	220-240	32	22	0.76	C
30	Horizontal	2500	220-240	48	34	0.91	C

Installation dimensions (mm)

Model	Inlet/outlet connections	Dimensions (mm)										Flange opening ($\varnothing$) mm	Net weight (kg)
		A	B	C	D	E	F	G	H	I	J		
20	1/2"	600	320	315	335	160	190	260	90	250	100	78	13.4
30	1/2"	810	320	315	335	160	190	340	90	355	100	78	16.6

